


Lama İtici Pim

DIN 1530 - F

1.2516 (120Wv4)VS

Sertlik Derecesi

Şaft : 60±2 HRC
Kafa : 45±5 HRC
Isı Direnci : 200°C / 292°F

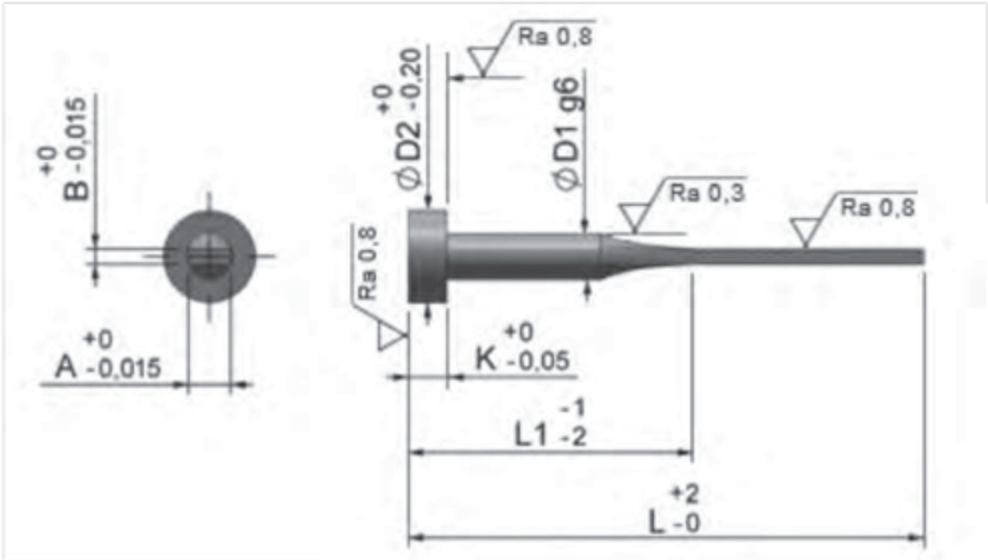

Pim Çapı	Lama Çapı	Lama Kal.	Kafa Çapı	Kafa Kal.	(Boylar) L												
					80		125		125		125		125		125		
					L1	40	L1	50	L1	60	L1	80	L1	100	L1	125	L1
4	3.5	1	8	3	■		■		■								
5	4.5	1	8	3	■		■		■		■						
5	4.5	1.2	10	3	■		■		■		■						
5	4.5	1.5	10	3	■		■		■		■						
6	5.5	1	10	3	■		■		■		■						
6	5.5	1.2	12	5	■		■		■		■						
6	5.5	1.5	12	5			■		■		■						
6	5.5	2	12	5			■		■		■						
8	7.5	1.2	12	5			■		■		■						
8	7.5	1.5	14	5			■		■		■			■			
8	7.5	2	14	5			■		■		■			■			■
10	9.5	1.5	16	5			■		■		■			■			■
10	9.5	2	16	5			■		■		■			■			■
12	11.5	2-2.5	20	7							■			■			■
16	15.5	2-2.5	22	7							■			■			■

