

Poliüretan Yaylar

Vulkolan


Poliüretan Yaylar (Vulkolan)

Teknik Veri Tablosu (Renk ve Shore'larına göre esneme payları)



90 shore
maksimum esneme payı %25

80 shore
maksimum esneme payı %30

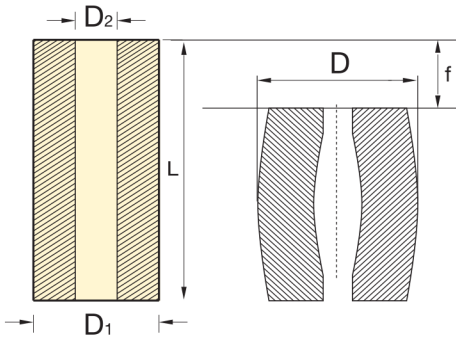

Poliüretan Kalıp Yaylarının Standart Çapları ve Boyları

D1	D2	L (mm)
Ø 16 mm	-	310
Ø 20 mm	-	310
Ø 20 mm	8,50	310
Ø 25 mm	-	310
Ø 25 mm	10,50	310
Ø 32 mm	-	310
Ø 32 mm	13,50	310
Ø 40 mm	-	310
Ø 40 mm	13,50	310
Ø 50 mm	-	310
Ø 50 mm	17	310
Ø 63 mm	-	310
Ø 63 mm	17	310
Ø 80 mm	-	310
Ø 80 mm	21	310
Ø 100 mm	-	310
Ø 100 mm	21	310
Ø 125 mm	-	310
Ø 125 mm	27	310

D1 Dış Çap	D2 Delik Çapı	L Tam Boy	SARI (80 SHORE)			KIRMIZI (90 SHORE)		
			P Yük/kg	D Esneme Max.çapı	F Esneme Max.boy	P Yük/kg	D Esneme Max.çapı	F Esneme Max.boy
16		12	179		3,6	226		3
		16	173		4,8	218		5
		20	170	21	6,0	212	20	5
		25	165		7,5	208		6,25
		32	160		9,6	200		8
20	8,5	12	274		3,6	334		3
		16	270		4,8	330		5
		20	260	26	6,0	324	25	5
		25	254		7,5	320		6,25
		32	250		9,6	308		8
25	10,5	16	437		4,8	540		4
		20	425		6,0	530		5
		25	412	33	7,5	520	31	6,25
		32	40		9,6	510		8
		40	380		12,0	50		10
32	13,5	50	365		15,0	480		12,50
		16	730		4,8	930		4
		20	720		6,0	900		5
		25	690	42	7,5	880	40	6,25
		32	670		9,6	850		8
40	13,5	40	650		12,0	820		10
		50	635		15,0	810		12,50
		20	1280		6,0	1620		5
		25	1260		7,5	1550		6,25
		32	1180	52	9,6	1500	50	8
50	17	40	1170		12,0	1450		10
		50	1120		15,0	1410		12,50
		69	1100		18,9	1380		15,75
		25	1980		7,5	2500		6,25
		32	1910		9,6	2400		8
63	17	40	1850	65	12,0	2300	62	10
		50	1810		15,0	2250		12,50
		63	1760		18,9	2200		15,75
		80	1730		24,0	2150		20
		32	3400		9,6	4200		9
80	21	40	3200		12,0	4050		10
		50	3100	82	15,0	3900	78	12,50
		63	3000		18,9	3800		15,75
		80	2900		24,0	3700		20
		100	2800		30,0	3600		25
100	21	40	5500		12,0	6900		10
		50	5250		15,0	6600		12,50
		63	5050	104	18,9	6400	99	15,75
		80	4900		24,0	6200		20
		100	4750		30,0	6000		25
125	27	125	4650		37,5	5800		31,25
		50	9000		15,0	1300		12,50
		63	8600		18,9	10800		15,75
		80	8250	130	24,0	10400	125	20
		100	8000		30,0	10000		25
125	27	125	7600		37,5	9700		31,25
		160	7500		48,0	9500		40
		63	14200		18,9	17600		15,75
		80	13200		24,0	16800		20
		100	12800	160	30,0	16000	156	25
125	27	125	12400		37,5	15300		31,25
		160	12000		48,0	15000		40

Ürünler talepleriniz doğrultusunda ölçülandırılabilir.